

Optimization by thermal cycling

A. Möbius¹, A. Neklioudov¹, A. Díaz-Sánchez^{1,2}, K.H. Hoffmann³, A. Fachat³, and M. Schreiber³

¹*Institut für Festkörper- und Werkstofforschung, D-01171 Dresden, Germany,*

²*Departamento de Física, Universidad de Murcia, E-30071 Murcia, Spain,*

³*Institut für Physik, Technische Universität Chemnitz, D-09107 Chemnitz, Germany*

(Dated: August 15, 1997)

An optimization algorithm is presented which consists of cyclically heating and quenching by Metropolis and local search procedures, respectively. It works particularly well when it is applied to an archive of samples instead of to a single one. We demonstrate for the traveling salesman problem that this algorithm is far more efficient than usual simulated annealing; our implementation can compete concerning speed with recent, very fast genetic local search algorithms.

PACS numbers: 02.60.Pn, 02.70.Lq

Combinatorial optimization problems have been a challenge for a long time. One of the most popular is the traveling salesman problem (TSP): how to find the shortest roundtrip through a given set of cities. It serves as a standard test for new optimization algorithms, for surveys see 1, 2. Many combinatorial optimization tasks are of considerable practical importance. Thus algorithms are highly desirable which yield good approximations of the exact solution within a reasonable CPU time, and which need only a modest effort in programming. As such, simulated annealing [3, 4] has become a standard procedure. Genetic algorithms have been increasingly successful, in particular such algorithms where local minima are the species considered, see 5, 6, 7 and references therein. Furthermore, e.g. alternately optimizing the system itself and various subsystems of it proved to be effective [8]. Still, the danger of getting trapped in any local instead of the global minimum increases with the size of the problem and cannot be overcome by these heuristic methods.

Simultaneously, exact methods have been developed further mainly using branch-and-bound and branch-and-cut ideas [9, 10]. Even a specific TSP instance including 7397 cities could be solved [1, 11]. However, for a given size, the effort necessary to find the exact solution can vary enormously from problem to problem; the TSPLIB95 [11] includes an instance of 1577 cities which has not been solved exactly yet. The ideas basic in exact algorithms can also be used as background for fast local search procedures. Applied to randomly chosen states, such restricted branch-and-bound search implementations can compete with simulated annealing with optimized schedule [12].

Here, we present an algorithm which combines the advantages of simulated annealing with those of fast local search procedures. Additionally, our algorithm utilizes an archive of local minima similarly to a recently published hybrid-Metropolis procedure [13]. First, we explain the general ideas of this algorithm. Then we illustrate its efficiency by considering several TSP instances.

Simulated annealing [3] can be understood as a ran-

dom journey of the sample (i.e. the approximate solution) through a hilly landscape formed by the states of its configuration space. The altitude, in the sense of a potential energy, corresponds to the quantity to be optimized. In the course of the journey, the altitude region accessible with a certain probability within a given number of steps shrinks gradually due to the decrease of the temperature in the Metropolis simulation [14] involved. The accessible area, i.e., the corresponding configuration space volume, thus shrinks until the sample gets trapped in one of the local minima.

Deep valleys attract the sample mainly by their area. However, it is tempting to make use of their depth. For that, we substitute the slow cooling down by a cyclic process: First, starting from the lowest state obtained so far, we randomly deposit energy into the sample by means of a Metropolis process with a certain temperature T , which is terminated, however, after a small number of steps. This part is referred to as heating. Then we quench the sample by means of a local search algorithm. This is an iterative process which consists in searching systematically the neighborhood (defined via the move class) of the actual state for states of lower energy, where always the first such state found is accepted. It stops when no lower neighboring state exists. Heating and quenching are cyclically repeated; the amount of energy (controlled by T) deposited in a cycle decreases gradually. This process continues until, within a 'reasonable' CPU time, no further improvement can be found.

Our procedure has some resemblance to genetic local search algorithms [5, 6, 7] as well as to the iterated Lin-Kernighan concept [1, 15, 16]. But there are substantial differences. In genetic local search algorithms, crossover is the process to produce long jumps overcoming barriers in the configuration space. In the iterated Lin-Kernighan approach, the sample is kicked out of the local minimum by moves chosen from a specific class not considered in local optimization. Our algorithm, however, is not based on introducing a class of particular elementary moves for crossing barriers. Instead, it makes use of an inherent feature of combinatorial optimization problems: whether

or not a certain move is permitted, or reduces energy, depends on the actual state. Loosely speaking, the moves do not commute. Thus, provided T is large enough, even exciting the sample by a sequence of several rather primitive moves of a type used also in quenching should be sufficient for the cycle returning to its initial state only very seldom. This simple concept should be applicable to all problems which can be treated by simulated annealing. Moreover, this approach permits to make good use of certain complex moves, which would diminish the efficiency of heating due to their huge number, by considering them only in quenching.

When our algorithm is applied to a specific problem, several choices have to be made. The first one concerns the starting temperature, cf. 17. One can relate it to the energy difference between random and quenched states, or to the local misfit in quenched states, in the sense of frustration of a spin glass.

The next issue is the amount of energy deposited into the sample while heating. Two contradicting demands have to be met: the gains of the previous cycles should be retained, but the modifications must be sufficiently large, so that another valley can be reached. Thus the heating process has to be terminated in an early stage of the equilibration. An effective method is to stop it after a fixed number of successful Metropolis steps.

Our recipe for controlling T makes use of the rate of finding final states of the heating-quenching cycles which have lower energies than all previous ones: we keep T constant as long as this rate exceeds a certain value. The lower this value, the better should on average be the final approximate solution.

The number of modifications performed within one heating process is small; moreover, only few of the cycles yield an improvement of the best state so far. Thus a considerable acceleration can be achieved by a reduction of the move class considered in heating: after each change of T , we tabulate those moves which excite the best state so far by energies not larger than T . While heating, we consider only these moves. However, during quenching, we consider the related complete move class.

Finally, one has to determine a stopping criterion. The most natural way is to compare the probability that the cycle returns the sample to its initial state (or to one with the same energy) with the probability of finding states of lower energy.

We improve now the above approach by searching the configuration space starting the cycles at random from one of N_a local minima held in an archive [13], instead of from the best state so far. In this simultaneous search, the above described table of moves for heating comprises the excitations of all archive states by energies up to T . We reduce this table utilizing ‘collective experience’: If all archive states have a certain common feature, the global minimum is likely to also have this feature. Therefore, after changing T , we determine those degrees of free-

dom which are frozen out, and eliminate all excitations from the table which concern one of those. This reduction corresponds to the use of ‘don’t look bits’ [7], or to the search for backbones [18].

In such a simultaneous search, it is tempting to simulate evolution by mutation and competition: If the energy of the final state of a cycle is smaller than that of the highest archive state, one would substitute this final state for the highest archive state. However, we observed that it is mostly preferable to replace the initial state of the actual cycle instead of the highest archive state.

Concluding the general part we mention two other interpretations of such an algorithm. In the biological context, our procedure is of the genetic local search type [5, 6, 7]. But it is based on mutations only, crossovers are not used. From an economist’s viewpoint [19], it increases the performance by means of risk reduction on two levels: (i) After leaving a local minimum, we perform only a small number of modifications before we decide whether or not the continuation of this way is promising. (ii) Several valleys are investigated simultaneously.

We have applied the above ideas to a series of symmetric traveling salesman problems, as well as to the Coulomb glass. In both cases, the corresponding codes work very efficiently. Here, we focus onto the TSP, where the length of the roundtrip has the meaning of the energy to be minimized. We use the following notions: tour and subtour denote closed roundtrips through all cities or part of the cities, respectively, whereas chains and subchains stand for tours and subtours with one connection eliminated, respectively.

The efficiency of our procedure, as well as that of simulated annealing, depends to a large extent on the move class taken into account. We consider two elementary heating processes: (i) cutting out from the tour a subchain, reversing its direction, and inserting it again at the same place; (ii) shifting a city from one to another position in the tour. However, we do not consider all such moves, but use the above introduced restrictions.

In quenching, we choose between four possibilities concerning the kind of metastability to be reached:

- (a) stable with respect to reverse of a subchain, as well as to a shift of a city (unrestricted move class of heating);
- (b) same as (a), and stable with respect to cutting three connections of the tour, and concatenating the three subchains in a new manner;
- (c) same as (b), and stable with respect to first cutting the tour twice and forming two separated subtours, and connecting then these subtours after cutting two other connections;
- (d) same as (c), and stable concerning a restricted Lin-Kernighan search [20] which consists in cutting the tour once, then several times alternately cutting the chain and concatenating the subchains, and finally connecting the ends of the chain again, where the number of trials to modify the chain is restricted to 1000.

The efficiency of our local search program rests on trying new connections according to increasing length, where appropriate bounds are utilized to terminate the search as soon as it becomes useless. Moreover, for stage (c), we demand that the sum of the lengths of the two closed subtours is shorter than the length of the original tour.

Our algorithm includes several adjustable parameters. They all influence simultaneously both the quality of the final result and the CPU time needed. Nevertheless, we have observed that they affect only rather weakly the performance of the algorithm, i.e., the quality of the averaged final result obtained for the archive size N_a adjusted so that the program finishes within a certain CPU time. For the TSP instances considered, the following values were good choices. First, we quench $50N_a$ times a randomly chosen tour, and set up the initial archive from the shortest N_a of the tours obtained. As starting temperature, we choose the reduction of the length when quenching a random tour, divided by the number of cities. In heating, we modify the tour always 50 times. At each T , we perform $5N_a$ heating-quenching cycles. If, during these cycles, an archive state has been replaced, we perform again $5N_a$ cycles, and so on. Otherwise, T is reduced by a factor of 0.9. We terminate the process when it has returned $10N_a$ times to an archive state (or to a state with equal energy) without any substitution of an archive state.

We tested our program considering five symmetric TSP instances out of the TSPLIB95 [11], including between 442 and 3795 cities. We performed several tests with different numbers of archive states, quenching always to metastability (d) defined above. The results are given in Table I. They demonstrate the high efficiency of our algorithm: For the instances with 442, 532, and 783 cities, the known exact optima were reproduced. The instances with 1577 and 3795 cities have not been solved exactly yet. Here, our best tour lengths agree with the known upper bounds for the optimum tour length [11].

However, our algorithm yields generally only an approximate solution. Thus the truly important property is the relation between mean quality of the solution and the necessary CPU time. We compared the performance of our program with that of the genetic local search algorithm [7] by Merz and Freisleben - a significantly improved version of their winning algorithm of the *First International Contest on Evolutionary Optimization* [21] -, and with the performance of the iterated Lin-Kernighan code by Johnson and McGeoch, illustrated by Table 16 of 1. (Our CPU is by factors of roughly 1.7 and 3 faster than the CPUs used in 7 and 1, respectively.)

- Compared to 7, our code has roughly the same efficiency for the three instances with several hundred cities. However, for the instances with 1577 and 3795 cities, our program is more efficient. In particular, for the task fl3795, it yields a significantly better mean value in less than one fourth of the CPU time.

Problem	N_a	$L_{\min}$	$L_{\max}$	L_{mean}	τ_{CPU}
pcb442	1	50778	51004	50849	25
pcb442	3	50778	50912	50794	69
pcb442	5	50778	50778	50778	145
att532	1	27686	27778	27722	32
att532	3	27686	27732	27707	88
att532	5	27686	27715	27694	191
att532	8	27686	27705	27692	372
att532	12	27686	27693	27686.4	645
rat783	1	8809	8829	8818	38
rat783	3	8806	8823	8812	101
rat783	5	8806	8810	8806.7	213
rat783	8	8806	8809	8806.1	427
rat783	12	8806	8806	8806	759
fl1577	1	22254	22289	22264	251
fl1577	3	22250	22267	22256	808
fl1577	5	22249	22261	22252.5	1730
fl1577	8	22249	22255	22251.8	3350
fl1577	12	22249	22253	22250.4	6070
fl3795	1	28775	28890	28809	2100
fl3795	3	28775	28830	28790	6300
fl3795	5	28772	28784	28776.5	13500
fl3795	8	28772	28780	28774.8	25900

TABLE I: Dependence of the tour length of the approximate solution, and of the CPU time on the archive size N_a for five instances out of the TSPLIB95 [11]. Smallest, largest, and mean tour lengths, $L_{\min}$, $L_{\max}$, and L_{mean} , are given for series of 20 runs. τ_{CPU} denotes the CPU time in seconds for a single run using one PA8000 180 MHz processor of an HP K460. The local search guaranteed stability with respect to demand (d) defined in the text.

- Compared to 1, our program is by a factor 5 to 10 slower for pcb442 and att532 if the accuracy of our results for $N_a = 3$ is achieved. The performance gap seems to shrink with increasing accuracy demand [22]. However, for fl3795, our code performs considerably better. The clear advantage of our program for fl3795 in both comparisons can arise from particular robustness, or from good scaling properties. Further investigations are needed to clarify this point, and to decide whether the advantage is caused by the use of thermal cycling to overcome barriers, or by a feature of our local search procedure.

One should also make comparison with the state of the art exact algorithms. For the Padberg-Rinaldi 532 city problem, the branch-and-cut program by Thienel and Naddef, one of the presently fastest exact codes, needs 16.5 minutes at a SPARC10 [23], corresponding to roughly 4 minutes for our CPU. Utilizing an archive of 12 states and cyclically quenching to stage (d) defined above, we performed 100 runs. Our Monte Carlo approach reproduced the optimum tour length 27686 in 95 of these runs, where it needed 11 CPU minutes for one of them. In the residual five cases, we obtained tours with length 27693.

We have shown above that thermal cycling can be used as basis for state of the art Monte Carlo optimizations.

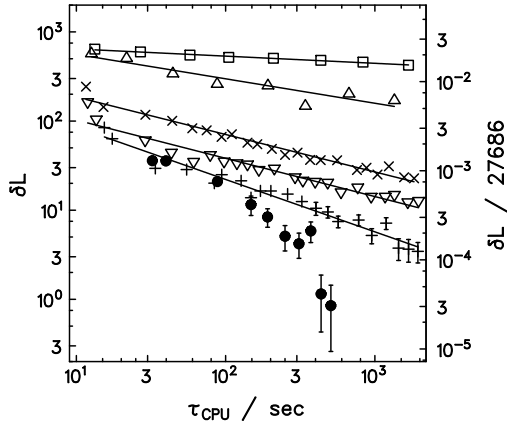


FIG. 1: Relation between CPU time, τ_{CPU} (in seconds for one PA8000 180 MHz processor of an HP K460), and deviation, $\delta L = L_{\text{mean}} - 27686$, of the obtained mean approximate solution from the optimum tour length for the Padberg-Rinaldi 532 city problem. $\square$: repeated quench to stability with respect to demand (a) defined in the text; $\triangle$: simulated annealing; $\times$, ∇ , $+$, $\bullet$: thermal cycling with archives of various size, and local search concerning conditions (a), (b), (c), and (d), respectively. In all cases, averages were taken from 20 runs. Errors (1σ -region) are presented if they exceed the symbol size. The straight lines are guides to the eye only.

Now, we demonstrate that this physical approach can be far more effective than standard concepts, even if only a comparatively small amount of time is invested in programming. For the Padberg-Rinaldi 532 city problem, Fig. 1 confronts four versions of our algorithm, differing from each other by the complexity of the local search, with usual simulated annealing, and with repeatedly quenching randomly chosen states. (Simulated annealing uses the same moves as heating above, but trials were restricted to the 30 nearest cities.) The figure shows that the thermal cycling procedure proposed is far faster than usual simulated annealing, even if the local search leads only to the ‘primitive’ metastability (a).

Concluding, we have shown that simulation of thermal cycling is an effective tool for treating combinatorial optimization problems. Its efficiency in finding very good approximations of the optimal solution was illustrated by considering the traveling salesman problem. Our algorithm, which is well appropriate for parallelising, should also be useful for a broad class of other combinatorial optimization problems.

This work was supported by the SMWK and DFG (SFB 393). We are particularly indebted to B. Freisleben and S. Thienel for valuable literature hints, as well as to M. Pollak and U. Rößler for a series of critical remarks. Moreover, discussions with F.-M. Dittes, M. Golden, D.S. Johnson, S. Kobe, A. Hartwig, M. Ortuño, M. Richter, and J. Talamantes were very useful.

- [1] D.S. Johnson and L.A. McGeoch, in *Local Search in Combinatorial Optimization*, eds. E. Aarts and J.K. Lenstra (Wiley, Chichester, 1997), p. 215.
- [2] M. Jünger, G. Reinelt, and G. Rinaldi, in *Network Models*, eds. M. Ball, T. Magnanti, C.L. Monma, G.L. Nemhauser, Vol. 7 of *Handbook on operations research and management sciences*, (North Holland, Amsterdam, 1995), p. 225.
- [3] S. Kirkpatrick, C.D. Gelatt, Jr., and M.P. Vecchi, *Science* **220**, 671 (1983).
- [4] P. van Laarhoven and E.H.L. Aarts, *Simulated Annealing: Theory and Applications*, (Dordrecht, Kluwer, 1992).
- [5] H. Mühlenbein, M. Gorges-Schleuter, and O. Krämer, *Parallel Computing* **7**, 65 (1988).
- [6] B. Freisleben and P. Merz, in *Proc. Int. Conf. on Parallel Problem Solving from Nature*, Berlin, Vol. 1141 of *Lecture notes in computer sciences*, eds. H.-M. Voigt, W. Ebeling, I. Rechenberg, and H.P. Schwefel (Springer, Berlin, 1996), p. 890.
- [7] P. Merz and B. Freisleben, in *Proc. 1997 IEEE Int. Conf. on Evolutionary Computing*, Indianapolis, (IEEE, Piscataway, 1997), p. 159.
- [8] F.-M. Dittes, *Phys. Rev. Lett.* **76**, 4651 (1996).
- [9] E. Balas and P. Toth, in *The Traveling Salesman Problem*, eds. E.L. Lawler, J.K. Lenstra, A.H.G. Rinnooy Kan and D.B. Shmoys (Wiley, Chichester, 1985), p. 361.
- [10] M. Jünger, G. Reinelt, and S. Thienel, *Z. Oper. Res.* **40**, 183 (1994).
- [11] G. Reinelt, *ORSA J. Comput.* **3**, 376 (1991); www.iwr.uni-heidelberg.de/iwr/comopt/soft/TSPLIB95.
- [12] A. Möbius and M. Richter, in *Evolution and Optimization '89. Selected Papers on Evolution Theory, Combinatorial Optimization and Related Topics*, eds. H.-M Voigt, H. Mühlenbein, and H.-P. Schwefel (Akademie-Verlag, Berlin, 1990), p. 199.
- [13] A. Möbius and P. Thomas, *Phys. Rev. B* **55**, 7460 (1997).
- [14] N. Metropolis, A.W. Rosenbluth, M.N. Rosenbluth, A.H. Teller, and E. Teller, *J. Chem. Phys.* **21**, 1087 (1953).
- [15] O. Martin, S.W. Otto, and E.W. Felten, *Operation Res. Lett.* **11**, 219 (1992).
- [16] O.C. Martin and S.W. Otto, in *Meta-Heuristics in Combinatorial Optimization*, eds. G. Laporte and I.H. Osman, *Ann. Oper. Res.* Vol. 63, (Balzer Scientific, Amsterdam, 1996), p. 57. Here, as in Z. Li and H.A. Scheraga, *Proc. Natl. Acad. Sci., U.S.A.*, **84**, 6611 (1987), the Metropolis aspect concerns the decision between local minima, not the leaving of them.
- [17] F.P. Marín, *Phys. Rev. Lett.* **77**, 5149 (1996).
- [18] J. Schneider, C. Froschhammer, I. Morgenstern, T. Huslein, and J.M. Singer, *Comp. Phys. Commun.* **96**, 173 (1996).
- [19] B.A. Huberman, R.M. Lukose, and T. Hogg, *Science* **275**, 51 (1997).
- [20] S. Lin and B. Kernighan, *Operations Research* **21**, 498 (1973).
- [21] H. Bersini, M. Dorigo, S. Langerman, G. Seront, and L. Gambardella, in *Proc. 1996 Int. Conf. Evolutionary Computation*, Nagoya, (IEEE, Piscataway, 1996), p. 611.

- [22] D.S. Johnson, private communication (1997).
- [23] S. Thienel, private communication (1997).